

INFORMATION

LUBRICATION

The engine and other lubricating systems are filled with high – performance lubricants giving prolonged life.


CAUTION: You should always use a high quality oil of the correct viscosity range in the engine and gearbox during maintenance and when topping – up. The use of oil not to the correct specification can lead to high oil and fuel consumption and ultimately to damaged components.

Oil to the correct specification contains additives which disperse the corrosive acids formed by combustion and prevent the formation of sludge which can block the oil ways. Additional oil additives should not be used. Always adhere to the recommended servicing intervals.

Engine oil

Use oil meeting specification RES.22.OL.G4 or the requirements of CCMC G4, and having a viscosity band recommended for the temperature range of your locality. Where oils to these Rover and European specifications are not available, well known brands of oils meeting API SG or SG/CD quality should be used.

SERVICE LUBRICANTS – ALL SEASONS

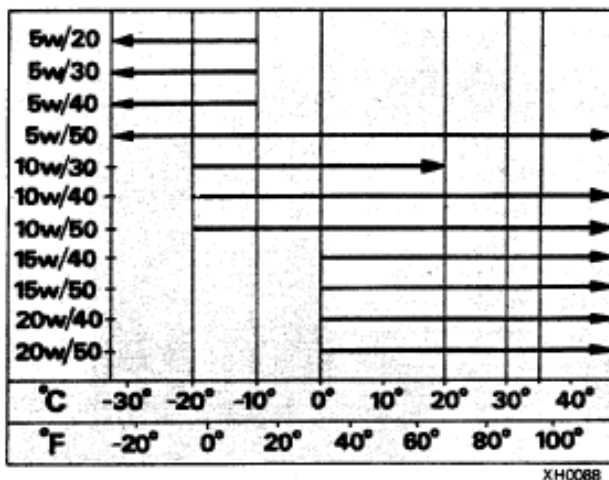

ENGINE OIL VISCOSITY/TEMPERATURE RANGES

Gearbox oil

Use oil meeting specification ATF type G for refill and topping up.

Rear axle

Use the following oil for refill or topping – up:

SHELL Spirax HD80W/90

If not available, a well known brand of SAE 90 grade oil meeting the specification of MIL – L – 2105C or A.P.I. GL5 quality should be used.

General Greasing

Use Multipurpose Lithium Base Grease N.L.G.I. consistency No. 2.

Bonnet latch

Lubricate cable and latch with oil.

Locks, Latches and Hinges

Use Door Lock and Latch Lubricant, Part No. VWN 10075.

INFORMATION


**RECOMMENDED SERVICE
LUBRICANTS**

Oil Company	Engine Oil	Gearbox Oil	Rear Axle Oil	General Greasing
Rover Specification	Rover RES. 22.OL, G4			
Other Specifications	CCMC G4			
BP	Visco 2000 Plus 10w/40	Autran MBX	Hypogear 80w/90 EP	Energrease L2
ESSO	Superlube Plus 10w/40 or Superlube EX2	Esso Automatic Transmission Fluid	Gear Oil GX 85w/90	Multipurpose Grease
GULF		Automatic Transmission Fluid II	Multipurpose Gear Lubricant 80w/90	Gulf Crown No. 2
MOBIL	Super 10w/40 Mobil 1 Super XHP 10w/40	Mobil ATF 220	Mobilube HD 80w-90	Mobilgrease HP 2
FINA	First 5w/40 Ekofina Turbo S 10w/40	Dexron II D	Pontonic MP 80w/90	Marson EP L2
SHELL	Helix Plus 10w/40	Dexron II D Donax TG	Spirax HD 80w/90	Retinax LX Retinax A
TEXACO	Havoline Multigrade	Texamatic Universal	Gearbox EP-B 85w/90	Multifak Purpose EP-2
TOTAL	Quartz	Fluid ATX	EPB 80w/90	Multis 2
UNIPART	Supreme 10w/40 Red 10w/40	Dexron II	Sureflow EP-B 80w/90	Multipurpose Grease
CASTROL	GTX 3 Lightec	TQ Dexron II E	EPX 80w/90	Castrol LM Grease
DUCKHAMS	Duckhams QXR or 10w/40 Motor Oil	Uni-Matic D-Matic	Hypoid 90S Gear Oil	Duckhams LB10 Grease

NOTE: The above products are not listed in any order of preference and the list is not necessarily exhaustive.

HEALTH WARNING: Used engine oils are contaminated. Avoid prolonged or repeated contact with all types and makes of engine oil.

Protect The Environment – Dispose of used oil properly. Do not empty into drains, pollute water systems, or pour onto the soil.